

SP1200D

FINN-POWER SP1200D DOUBLE HEAD CRIMPER FOR COMPLEX BENT HOSE ASSEMBLIES

Finn-Power SP1200D side feed crimping machine allows side feeding of the hose and crimping both ends at the same time. Automotive hose assemblies are often having complex bent shapes, which can be challenging and time consuming to crimp on traditional pass through crimpers. Finn-Power C-frame technology offers innovative solutions for this demanding use.

SP1200 has crimping force of 1200 kN, to handle automotive hose assemblies and small hydraulic hoses. State of the art ICC-control offers various features for quality control and work queues, as well as ensuring all fittings of the hose assembly will be crimped.

TECHNICAL DATA


Crimping range (mm) ¹⁾	10-54
Crimping range (inch) ¹⁾	0.39-2.12
Max. crimping force (kN)	1200
Max. crimping force (tonnage)	120
Cycle time 10 mm (s) ²⁾	2.1
Hose size ID (inch)	1 1/4
Die set series ³⁾	CC22
Max. opening (mm) ⁴⁾	+25/+63
Master die D/L (mm)	84/78
Master die D/L (inch)	3.31/3.07
Motor Power (kW/HP)	4.0/5.5
Oil tank volume	2 x 50 l

DIMENSIONS (LxWxH)

Machine (mm)	880x3700x2086
Machine (inch)	34.6x145.6x80

WEIGHT (KG/LBS)

2250/4950

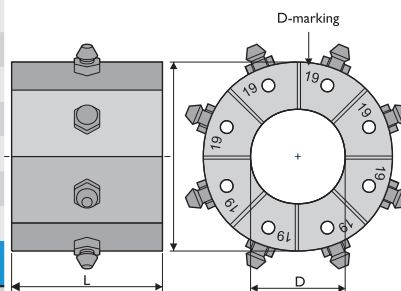

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10mm cycle.
- 3) See table for die set data.
- 4) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

CONTROL


ICC (7" touchscreen)

STANDARD FEATURES

QuickChange-tool
Foot pedal
Motorized movement of second head
Position display
3 meter table (other lengths available)
M8 groove on table profile for jig installation

OPTIONS

Double hand operation panel
Pressure crimping ICC1
Step crimping ICC2
Quality control ICC3
Graphical quality control ICC4
Interface pack ETH (Communication TCP/IP & UDP)
Bar Code Reader BCR
Auto greasing G3
ICC 12" display

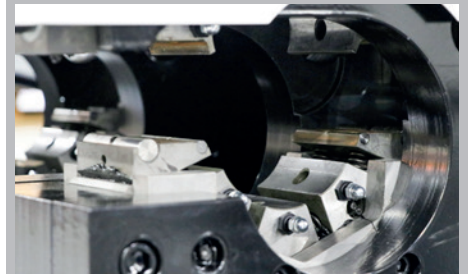

DIE SET CC22-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18315/10	10	50	10.0-12.0
18315/12	12	50	12.0-14.0
18315/14	14	50	14.0-16.0
18315/16	16	50	16.0-19.0
18315/19	19	50	19.0-23.0
18315/23	23	50	23.0-27.0
18315/27	27	50	27.0-31.0
18315/31	31	50	31.0-36.0
18315/36	36	50	36.0-41.0
18315/41	41	50	41.0-47.0
18315/47	47	50	47.0-54.0

In addition to the standard die sets, a wide range of special die sets is available on request.

FURTHER INFO ON OPTIONS,
PLEASE REVERT TO SPECIFIC PRODUCT CARD

POWERCO.LILLBACKA.COM